



## HS-Mounting Frames



HS-Luftfilterbau offers torsion-resistant, corrosion-free mounting frames made of galvanized steel or stainless steel with flat or non-porous endlessly foamed gasket. The following filters can be mounted to the frames:

- Panel filters (HS-Z-50) 48-50 mm depth
- Bag filters (HS-Pak 35 to HS-Pak 95)
- Compact filters (HS-Mikro Pak, HS-ECO Pak)
- Compact V-Bank carbon filters (HS-Carbo Pak)

The filters are centered and fixed by a bracing springs. All frames are pre-equipped with mounting drill holes and may therefore easily be assembled into a filter wall. Its stability is guaranteed through reinforcement plates.


HS-Mounting Frames: Dimensions [mm]				
	Frame		Filterinsert	
	Width	Height	Width	Height
	610	610	592	592
	508	610	490	592
	305	610	287	592
	305	305	287	287
	610	910	592	892
	508	910	490	892
	305	910	287	892

Please ask for other desired dimensions and designs.

Form of delivery	▪ mounting frame w/o filter or filtermedia
Options	<ul style="list-style-type: none"> <li>▪ base material: galv. steel, stainless</li> <li>▪ gasket: foamed gasket, flat-section gasket, FDA approved gaskets</li> <li>▪ odd sizes</li> </ul>

### Side view

T = 72 [mm]  
A = 38 [mm]  
B = 125 [mm]

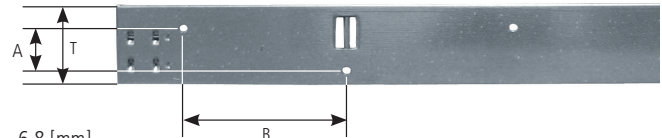

diameter of bore = 6,8 [mm]

### Inner view

endlessly foamed, non porous polyurethane gasket

adjustable clamps for framedepth's of 25 mm and 50 mm

