

HS-Mounting Frames



HS-Luftfilterbau offers torsion-free, corrosion-free mounting frames made of galvanized steel plate or stainless steel with flat or non-porous gasket. The following filtration media can be placed into the frames:

- Pocket Filter (HS-Pak 35 through HS-Pak 95)
- Compact Filter (HS-Micro Pak, HS-Eco Pak)
- Compact Carbon filters (HS-Carbo Pak)
- Filtration cells

The media is centered and fixed by a bracing spring. All frames are pre-equipped with mounting holes and may therefore be assembled into a filtration wall easily. Its stability is guaranteed through stiffeners.

■ Specifications:


- galvanized steel, stainless steel
- gasket: flat, non-porous, endless
- customized sizes available

| HS-Mounting frames | | | |
|--------------------|--------|--------|--------|
| Dimensions [mm] | | | |
| Frame | | Filter | |
| Width | Height | Width | Height |
| 610 | 610 | 592 | 592 |
| 508 | 610 | 490 | 592 |
| 305 | 610 | 287 | 592 |
| 305 | 305 | 287 | 287 |
| 610 | 910 | 592 | 892 |
| 508 | 910 | 490 | 892 |
| 305 | 910 | 287 | 892 |

Our flexible production will be able to assemble the units upon your request. Please ask for **further dimensions and configurations.**

Sideview


- T = 72 [mm]
- A = 38 [mm]
- B = 125 [mm]

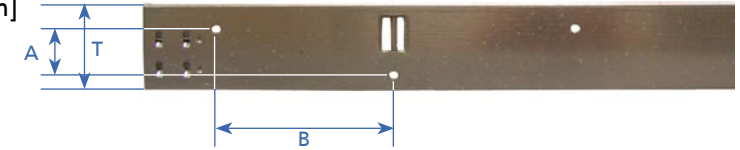

diameter of drillholes = 6,8 [mm]

Inner view

non porous, endless foamed PU-gasket.

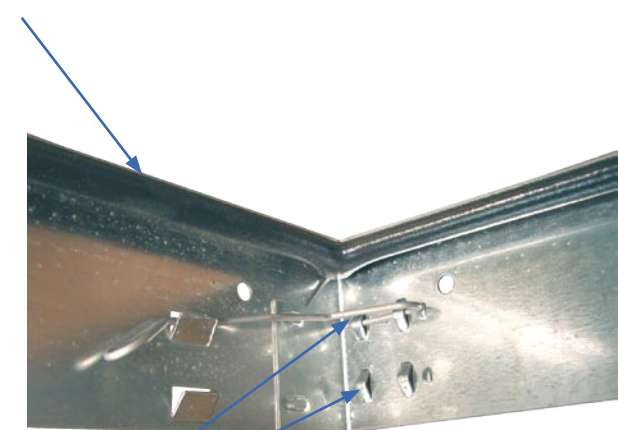

adjustable clamps for framedepth's of 25 mm and 50 mm.

